


Does Your Business “Need A Lift?”

Buy our Portable Radial Stacking Conveyor!

Increase
Productivity!

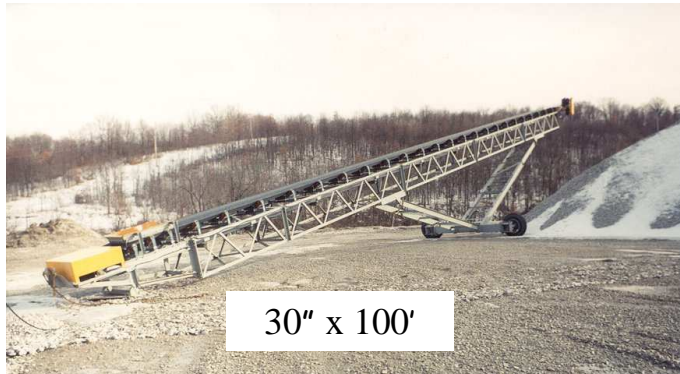

Reduce
Operating
Costs!

PRICING ON REQUEST

Dover Standard Specifications for 30" wide x 100' long Portable Radial Stacking Conveyor

- 4" dia., 35 degree, CEMA "B" idlers.
- 220 PIW 2-ply conveyor belting. 3/16" x 1/16" covers. Mechanical Splice
- Crowned face head pulley with vulcanized lagging.
- Backstop.
- 36" deep angle truss frame having 3" x 3" x 1/4" cord angles and 2" x 2" x 3/16" diagonal windbrace angles.
- Receiving Hopper: 5'-0" long with live rubber skirts.
- Crowned face self-cleaning tail pulley.
- Shafting: SAE 1045 steel shaft (turned, ground, & polished).
- Dodge reducer & bearings.
- Spring-loaded wiper blade.
- Plated hardware.
- Paint: Rust inhibitive primer plus one coat of industrial enamel.

Also available: Widths from 18" to 72" & Lengths from 30' to 200'

Contact Us Today!

3323 Brightwood Road
P.O. Box 300
Midvale, Ohio 44653

Phone: 740-922-9390
Fax: 740-922-9391

E-mail: sales@doverconveyor.com
Visit our Website: www.doverconveyor.com

Conveying the Resources of the World

DOVER
CONVEYOR INC.